



# SIX BEAM FLEXING COUPLINGS

**METRIC BORES  
2 TO 30 MM**


## SET SCREW AND CLAMP HUB STYLES

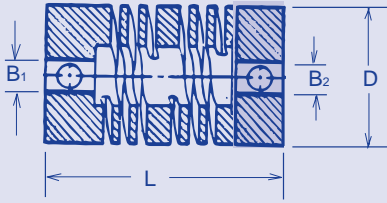

SET SCREW HUB TYPE NON RELIEVED

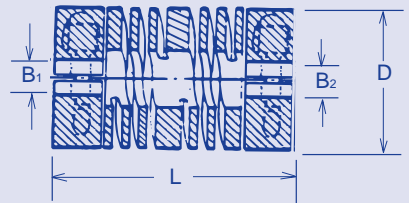

CLAMP HUB TYPE NON RELIEVED

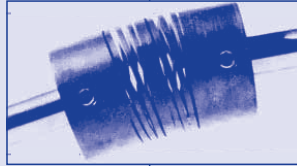

Screws Supplied

Screws Supplied

**MATERIAL: 303 Stainless Steel. Anodized Aluminum.** Six Flexing Beams, (more flexible than Three Beam), No Backlash, Reversible.

**ORDER BY CATALOG NUMBER**

Cat. No. Set Screw	Cat. No. Clamp Type	Cat. No. Set Screw	Cat. No. Clamp Type	Bore Diameters +.03mm/-0		O.D. mm & in	Length	Misalignment		Max Torque in Nm	
				B1	B2			Angular	Parallel	SS	Alum
Stainless		Aluminum				D	L	Offset	Offset		
CIS-M3-1	CIS-M4-1	CIA-M3-1	CIA-M4-1	2,0	3,0						
CIS-M3-2	CIS-M4-2	CIA-M3-2	CIA-M4-2	3,0	3,0	9,52 (3/8")	19,55	30	.12	1,5	1,0
CIS-M3-3	CIS-M4-3	CIA-M3-3	CIA-M4-3	3,0	4,0						
CIS-M3-4	CIS-M4-4	CIA-M3-4	CIA-M4-4	4,0	4,0						
*CIS-M3-5	*CIS-M4-5	*CIA-M3-5	*CIA-M4-5	3,0	3,0	12,7 (1/2")	25,4 stst 22,9 alum	50	.17	3,0	2,0
CIS-M3-6	CIS-M4-6	CIA-M3-6	CIA-M4-6	3,0	5,0						
CIS-M3-7	CIS-M4-7	CIA-M3-7	CIA-M4-7	5,0	5,0						
CIS-M3-8	CIS-M4-8	CIA-M3-8	CIA-M4-8	6,0	6,0						
CIS-M3-9	CIS-M4-9	CIA-M3-9	CIA-M4-9	5,0	6,0						
CIS-M3-10	CIS-M4-10	CIA-M3-10	CIA-M4-10	6,0	6,0	19,1 (3/4")	28,0 stst 26,5 alum	70	.25	8,0	5,3
CIS-M3-11	CIS-M4-11	CIA-M3-11	CIA-M4-11	6,0	10,0						
CIS-M3-12	CIS-M4-12	CIA-M3-12	CIA-M4-12	10,0	10,0						
CIS-M3-13	CIS-M4-13	CIA-M3-13	CIA-M4-13	6,0	6,0						
CIS-M3-14	CIS-M4-14	CIA-M3-14	CIA-M4-14	8,0	8,0	25,4 (1")	38,1	70	.38	16	10
CIS-M3-15	CIS-M4-15	CIA-M3-15	CIA-M4-15	10,0	10,0						
CIS-M3-16	CIS-M4-16	CIA-M3-16	CIA-M4-16	12,0	12,0						
CIS-M3-17	CIS-M4-17	CIA-M3-17	CIA-M4-17	6,0	10,0						
CIS-M3-18	CIS-M4-18	CIA-M3-18	CIA-M4-18	10,0	10,0	31,75 (1.25")	57,15	70	.50	25	15
CIS-M3-19	CIS-M4-19	CIA-M3-19	CIA-M4-19	12,0	12,0						
CIS-M3-20	CIS-M4-20	CIA-M3-20	CIA-M4-20	16,0	16,0						
CIS-M3-21	CIS-M4-21	CIA-M3-21	CIA-M4-21	10,0	12,0						
CIS-M3-22	CIS-M4-22	CIA-M3-22	CIA-M4-22	12,0	12,0						
CIS-M3-23	CIS-M4-23	CIA-M3-23	CIA-M4-23	16,0	16,0						
CIS-M3-24	CIS-M4-24	CIA-M3-24	CIA-M4-24	14,0	14,0	44,45 (1.75")	76,2	70	.80	48	30
CIS-M3-25	CIS-M4-25	CIA-M3-25	CIA-M4-25	16,0	16,0						
CIS-M3-26	CIS-M4-26	CIA-M3-26	CIA-M4-26	20,0	20,0						
CIS-M3-27	CIS-M4-27	CIA-M3-27	CIA-M4-27	20,0	20,0	57,15 (2.25")	130	70	1,0	102	55
CIS-M3-28	CIS-M4-28	CIA-M3-28	CIA-M4-28	25,0	25,0						
CIS-M3-29	CIS-M4-29	CIA-M3-29	CIA-M4-29	30,0	30,0						

\*Bores manufactured with insert at Nordex option. Bores and tapped holes anodized at Nordex option.

**NORDEX**

**(800) 243-0986**  
In CT (203) 775-4877

**20C**