


SIX BEAM FLEXING COUPLINGS

METRIC BORES
2 to 30 mm

SET SCREW AND CLAMP HUB STYLES

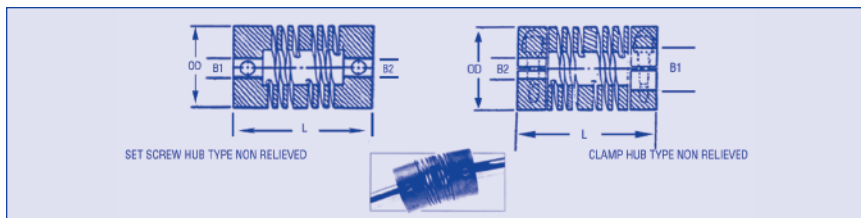

MATERIAL: 303 Stainless Steel. Anodized Aluminum.

Six Flexing Beams, (more flexible than Three Beam), No Backlash, Reversible. Screws are supplied.

ORDER BY CATALOG NUMBER

Catalog Number Set Screw	Catalog Number Clamp Type	Catalog Number Set Screw	Catalog Number Clamp Type	Bore Diameters +.03mm/-0		O.D. mm & in	Length	Misalignment		Max Torque in Nm	
				B1	B2			Angular	Parallel	SS	Alum
Stainless		Aluminum						Offset	Offset		
CIS-M3-1	CIS-M4-1	CIA-M3-1	CIA-M4-1	2,0	3,0						
CIS-M3-2	CIS-M4-2	CIA-M3-2	CIA-M4-2	3,0	3,0	9,52	19,55	30	,12	1,5	1,0
CIS-M3-3	CIS-M4-3	CIA-M3-3	CIA-M4-3	3,0	4,0	3/8"					
CIS-M3-4	CIS-M4-4	CIA-M3-4	CIA-M4-4	4,0	4,0						
*CIS-M3-5	*CIS-M4-5	*CIA-M3-5	*CIA-M4-5	3,0	3,0						
CIS-M3-6	CIS-M4-6	CIA-M3-6	CIA-M4-6	3,0	5,0	12,7	25,4 stst	50	,17	3,0	2,0
CIS-M3-7	CIS-M4-7	CIA-M3-7	CIA-M4-7	5,0	5,0	1/2"	22,9 alum				
CIS-M3-8	CIS-M4-8	CIA-M3-8	CIA-M4-8	6,0	6,0						
CIS-M3-9	CIS-M4-9	CIA-M3-9	CIA-M4-9	5,0	6,0						
CIS-M3-10	CIS-M4-10	CIA-M3-10	CIA-M4-10	6,0	6,0	19,1	28,0 stst	70	,25	8,0	5,3
CIS-M3-11	CIS-M4-11	CIA-M3-11	CIA-M4-11	6,0	10,0	3/4"	26,5 alum				
CIS-M3-12	CIS-M4-12	CIA-M3-12	CIA-M4-12	10,0	10,0						
CIS-M3-13	CIS-M4-13	CIA-M3-13	CIA-M4-13	6,0	6,0						
CIS-M3-14	CIS-M4-14	CIA-M3-14	CIA-M4-14	8,0	8,0	25,4	38,1	70	,38	16	10
CIS-M3-15	CIS-M4-15	CIA-M3-15	CIA-M4-15	10,0	10,0	1"					
CIS-M3-16	CIS-M4-16	CIA-M3-16	CIA-M4-16	12,0	12,0						
CIS-M3-17	CIS-M4-17	CIA-M3-17	CIA-M4-17	6,0	10,0						
CIS-M3-18	CIS-M4-18	CIA-M3-18	CIA-M4-18	10,0	10,0	31,75	57,15	70	,50	25	15
CIS-M3-19	CIS-M4-19	CIA-M3-19	CIA-M4-19	12,0	12,0	1.25"					
CIS-M3-20	CIS-M4-20	CIA-M3-20	CIA-M4-20	16,0	16,0						
CIS-M3-21	CIS-M4-21	CIA-M3-21	CIA-M4-21	10,0	12,0	38,1	66,57	70	,60	36	22
CIS-M3-22	CIS-M4-22	CIA-M3-22	CIA-M4-22	12,0	12,0	1.50"					
CIS-M3-23	CIS-M4-23	CIA-M3-23	CIA-M4-23	16,0	16,0						
CIS-M3-24	CIS-M4-24	CIA-M3-24	CIA-M4-24	14,0	14,0	44,45	76,2	70	,80	48	30
CIS-M3-25	CIS-M4-25	CIA-M3-25	CIA-M4-25	16,0	16,0	1.75"					
CIS-M3-26	CIS-M4-26	CIA-M3-26	CIA-M4-26	20,0	20,0						
CIS-M3-27	CIS-M4-27	CIA-M3-27	CIA-M4-27	20,0	20,0	57,15	130	70	1,0	102	55
CIS-M3-28	CIS-M4-28	CIA-M3-28	CIA-M4-28	25,0	25,0	2.25"					
CIS-M3-29	CIS-M4-29	CIA-M3-29	CIA-M4-29	30,0	30,0						

*Bores manufactured with insert at Nordex option. Bores and tapped holes anodized at Nordex option.